

# HDMI Digital Monitor Output Camera

*Splendidly High Quality*

## 1.5M Pixel CCD Camera

## MODEL : ARTCAM-150P4-HDMI

### SPECIFICATION

- Embedded USB2.0 interface
  - SXGA 12~18FPS
  - Taking 10bit image function  
\* Only when you use SDK
  - SDK(DLL)
  - 1.5M Pixel CCD sensor
  - Color / Monochrome
  - HDMI(High Definition Multimedia Interface) Ver1.2
- Sensor : 1.5M Pixel CCD
  - Active Pixels : 1392(H)×1040(V)
  - Active Imager Size : 4.65×4.65μm

- Transfer Method : Progressive Scan
- Shutter Type : Global Shutter
- Lens Mount : C Mount
- Out Put : USB2.0(8 or 10bit digital output)  
HDMI Ver1.2 1080p@60
- USB Standard : USB2.0 Bulk transfer, Streaming output
- Size : 50(W)×56(H)×75(D)mm
- Power Supply : +5V 1.5A outlet
- Running Temperature : 0°C~35°C(Recommended),  
Humidity Under 80%(No Condensation)

Operation System : WINDOWS XP  
Recommended PC : Above ICH5  
CPU : Pentium4 Above 1.7GHz (Need embeded USB2.0 port)  
Memory : Above 512MB  
Included : Device Driver, Viewer Software, 5V AC Adapter, 1.8m USB cable  
Optional : C Mount Lens, HDMI Monitor, 1.5m / 3m / 5m HDMI Cable,  
SDK, HDMI-DVI converting connector, DVI cable

## 1.3M Pixel CMOS Camera


## MODEL : ARTCAM-130MI-HDMI

### SPECIFICATION

- Embedded USB2.0 interface
  - SXGA 15FPS
  - Taking 10bit image function  
\*Only when you use SDK
  - SDK(DLL)
  - 1.3M Pixel CMOS sensor
  - Color / Monochrome
  - HDMI(High Definition Multimedia Interface) Ver1.2
- Sensor : 1.3M Pixel CMOS
  - Active Pixels : 1280 (H) ×1024 (V)
  - Active Imager Size : 5.2×5.2μm

- Transfer Method : Progressive Scan
- Shutter Type : Rolling Shutter
- Lens Mount : C Mount
- Out Put : USB2.0(8 or 10bit digital output)  
HDMI Ver1.2 1080p@60
- USB Standard : USB2.0 Bulk transfer, Streaming output
- Size : 50(W)×56(H)×75(D)mm
- Power Supply : +5V 1.5A outlet
- Running Temperature : 0°C~35°C(Recommended),  
Humidity Under 80%(No Condensation)

Operation System : WINDOWS XP  
Recommended PC : Above ICH5  
CPU : Pentium4 Above 1.7GHz (Need embeded USB2.0 port)  
Memory : Above 512MB  
Included : Device Driver, Viewer Software, 5V AC Adapter, 1.8m USB cable  
Optional : C Mount Lens, HDMI Monitor, 1.5m / 3m / 5m HDMI Cable,  
SDK, HDMI-DVI converting connector, DVI cable

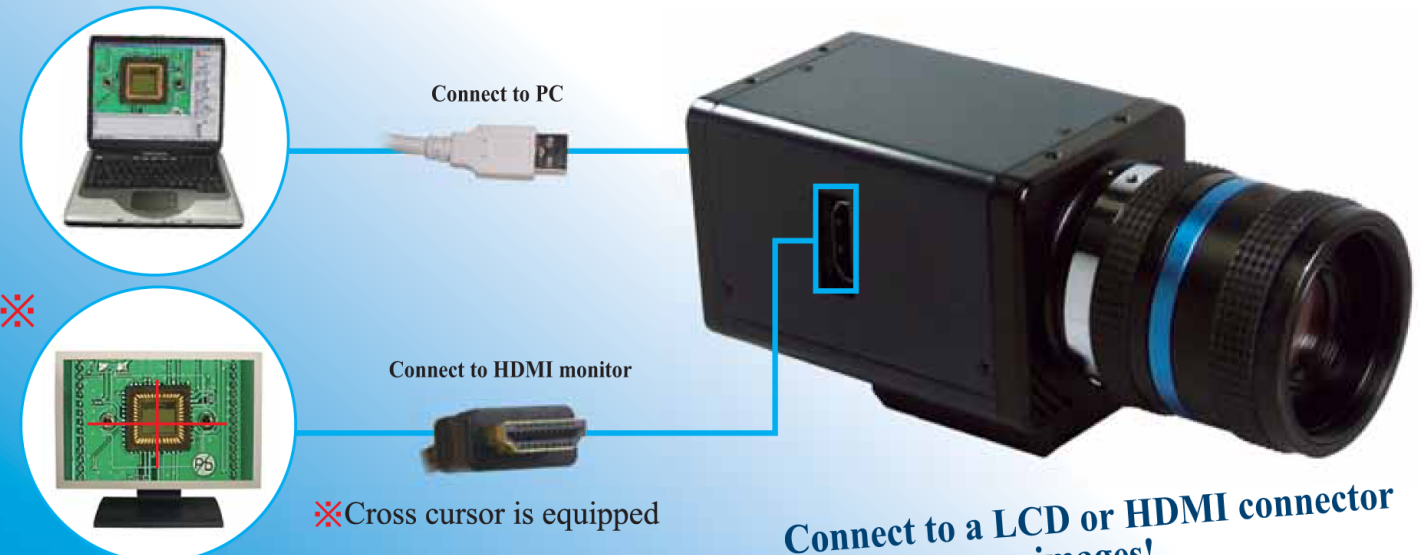

**Connect to a LCD or HDMI connector  
and you can see images!**

**You don't need PC to see images!**



NOTES: Our HDMI output camera may not work at some HDMI monitors.

We checked those monitors:

- Most of PC monitor with HDMI or DVI connector --- OK ○
- TV monitor with HDMI
  - SHARP(AQUOS) --- OK ○
  - TOSHIBA(REGZA) --- OK ○
  - SONY(BRAVIA) --- NG ✗
  - PANASONIC(VIERA) --- NG ✗

**We sell HDMI monitors to world wide, ask more detail  
to your sales representative.**



Visions Connection  
11409 West Bernardo Court • San Diego, CA 92127  
Phone: 714-296-5768 • Fax: (858) 613-1815  
www.visionsconnection.com  
Contact: Al SabeH  
E-mail: al@visionsconnection.com