


SM6X11M

3.6MP

11~66mm F1.8 – C-Mount
 Compatible with 2/3", 1/2", and 1/3" Cameras

Focal Length:	11~66mm	Optical Back Focal Distance:	15.28mm (In Air)
Max. Relative Aperture:	1:1.8	Operation: Zoom:	Motorized (DC±6.4V~12V, Max 40mA) Speed Approx. 6 sec. (at 6.4V)
Iris:	F1.8~Close	Focus:	Motorized (DC±6.4V~12V, Max 40mA) Speed Approx. 7 sec. (at 6.4V)
Zoom Ratio:	6X	Iris:	Motorized (DC±6.4V~12V, Max 40mA) Speed Approx. 3 sec. (at 6.4V)
Angular Field of View:	2/3": 43.3° × 33.0° at 11mm 7.7 × 5.8° at 66mm 1/2": 32.4° × 24.6° at 11mm 5.6° × 4.2° at 66mm 1/3": 24.6° × 18.6° at 11mm 4.2° × 3.1° at 66mm	Operation Temperature:	-10 ~ +50°C (+14 ~ 122° F)
Min. Object Distance (M.O.D.):	1.4m (From Front Vertex)	Filter Size:	72mm P0.75
		Mount:	CS-mount (Adjustable Lens Position)
		Size, Approx. Weight:	85 × 84.5 × 120mm (w/h/d), 700g (Approx. 3.3 × 3.3 × 4.7in., 1.5lbs.)

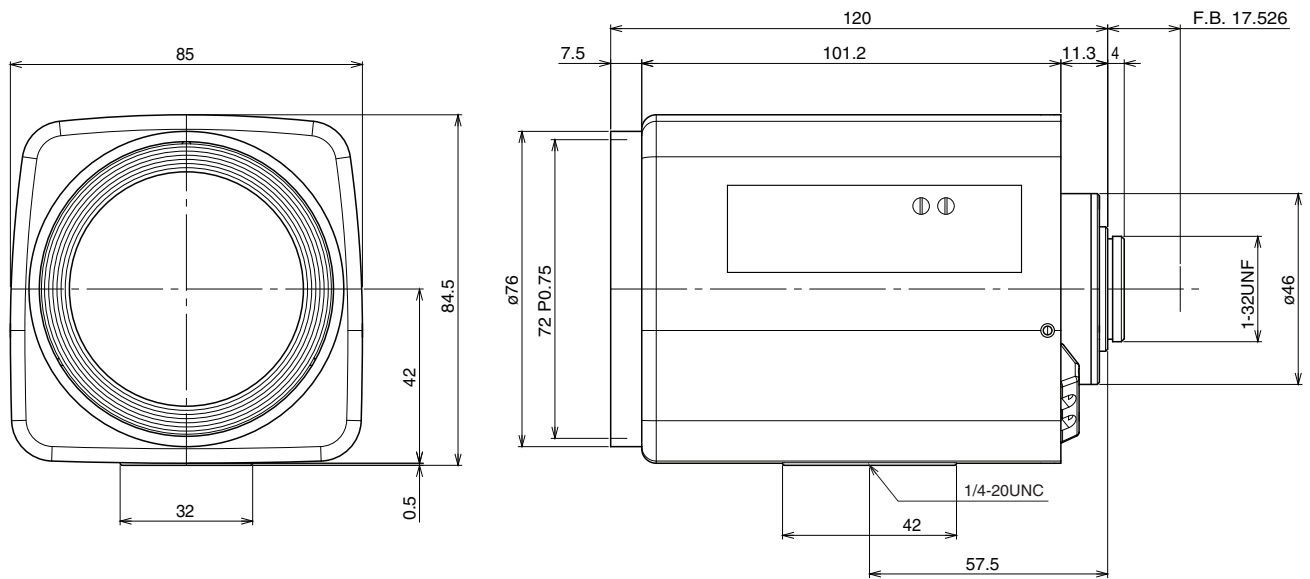

– Circuit Diagram –

